

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 15 TWN. 14_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 1-22-10
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Survey Marker Nail Set
Method of Establishment: County: 3-23-1990
IN S.P.C. E Zone, NAD 83 (1986)
Name: 14021510
N: 490 177.816 0(m)
E: 45 416.141 0(m)

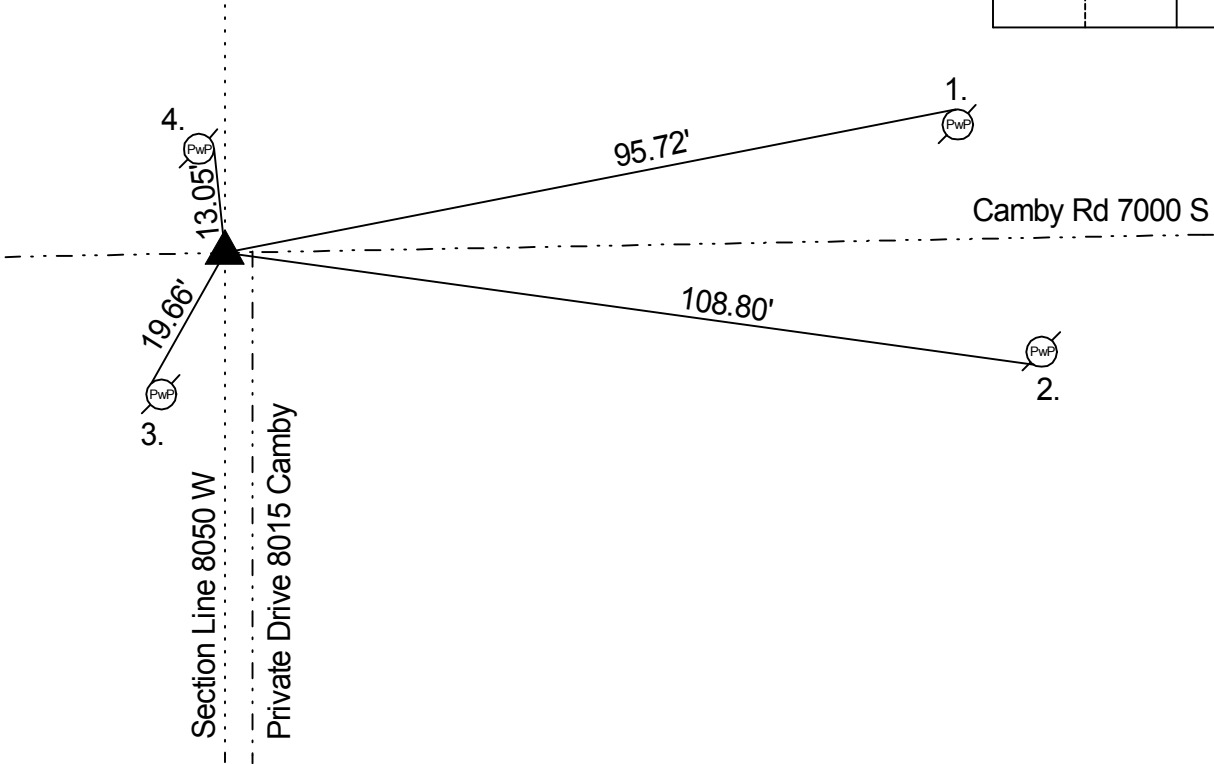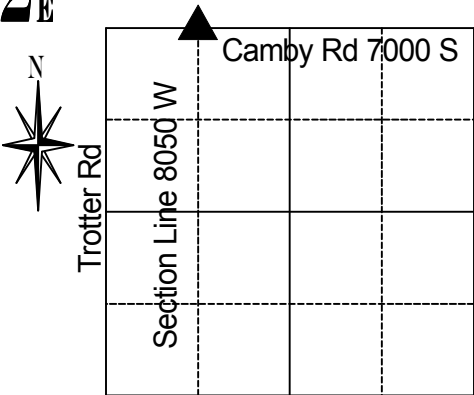

2-23-1857 Wm P Case set a post with witnesses: oak 30”dia. S 43 W 105 links, oak 20” dia. N 45 W 99 links, as per pg 13 of the Marion County Surveyors Record Decatur Twp. 3-23-1990 Greene called corner a RR spike at surface over stone. 4-10-95 Wilcoxen called corner a RR spike over stone. 4-24-2000 Kiste called corner a RR spike at surface. 1-28-05 Wilcoxen called corner a RR spike at surface. 1-22-10 Wilcoxen set a survey mark nail at surface for the corner.

REF.	DISTANCE	DESCRIPTION
1.	95.72'	PK nail N PwP no# 15" up
2.	108.80'	Mag nail w/brass washer SW PwP no# 12" up
3.	19.66'	PK nail NW telephone pole #144-741Y 12" up
4.	13.05'	PK nail E PwP no# 8" up

THIS CORNER POSITION
REPRESENTS A "TITLE" CORNER
AND MAY NOT NECESSARILY
REPRESENT THE POSITION BASED
ON RECORD CORNERS.